



FLARM to ClearNav Power and Data Connections

FLARM RJ45 (8P8C)

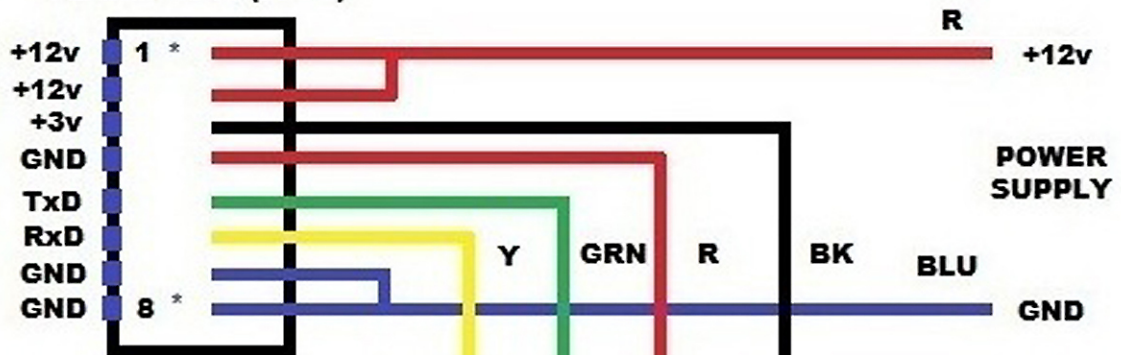



*FLARM uses IGC pin numbers convention which is reverse to industry standards.

ClearNav RJ11 (6P4C)

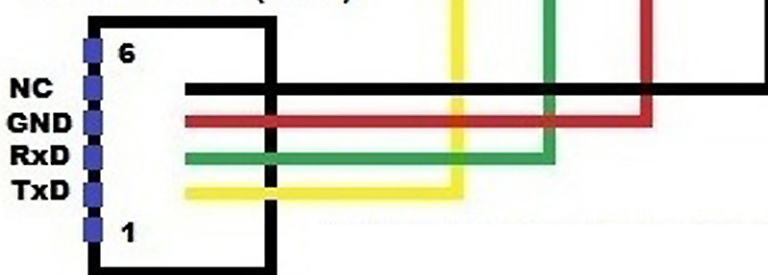


PowerFLARM to ClearNav Data (Power) Cable (Brick)
(when Butterfly Display is connected to RJ45 Port)

FLARM DB-9

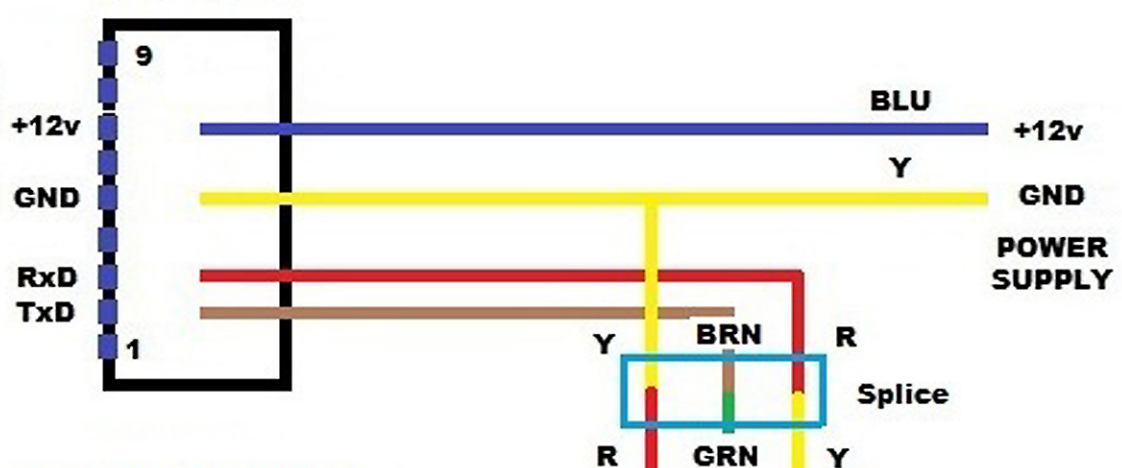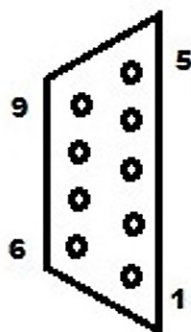

ClearNav RJ11 (6P4C)

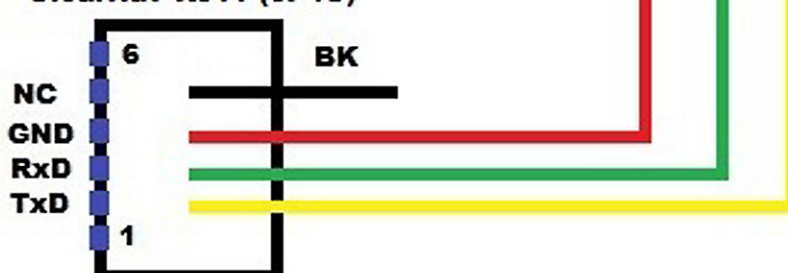

RJ cable connectors shown contact face up (tab down)"